




防挂偏开关 (新安装位置)

LIMIT SWITCH


A
1:3

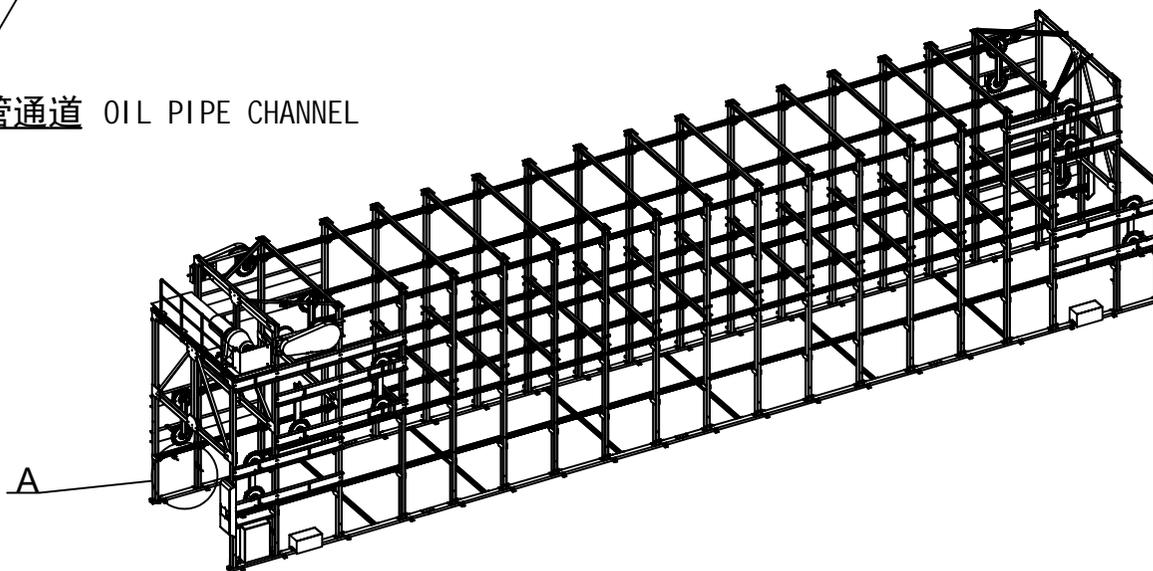

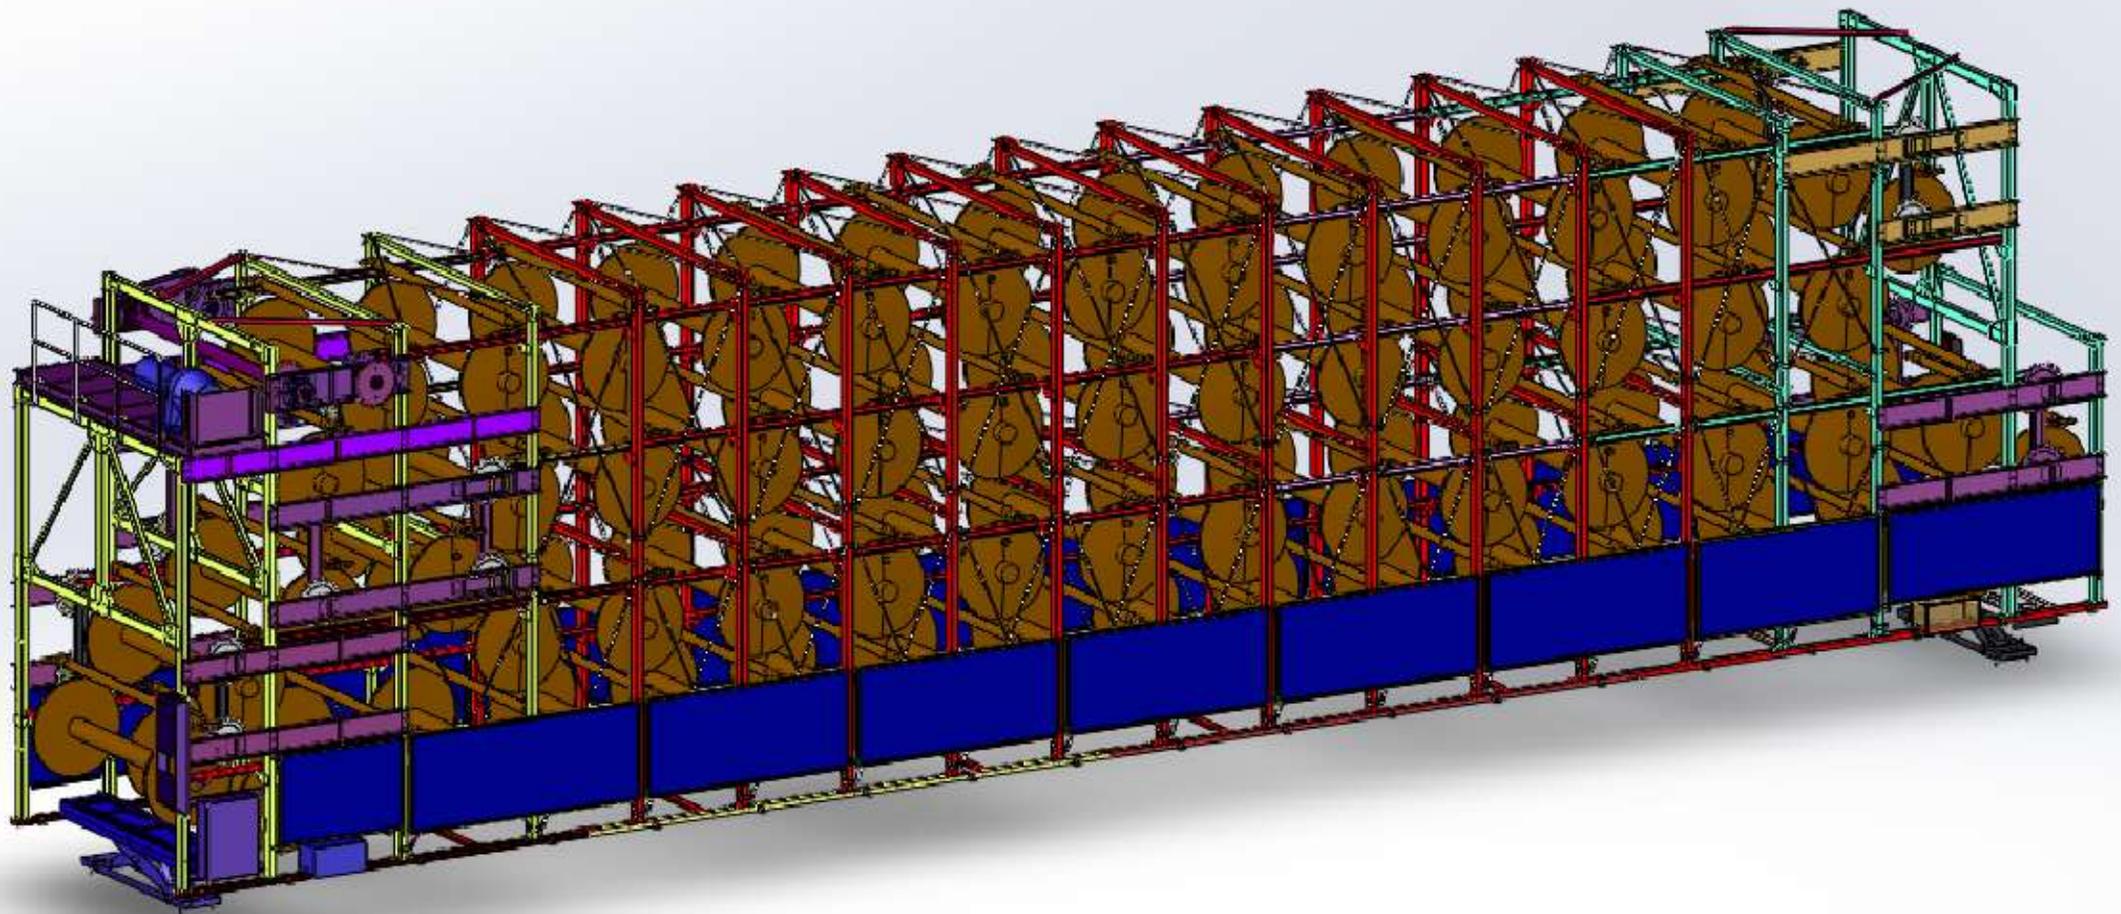

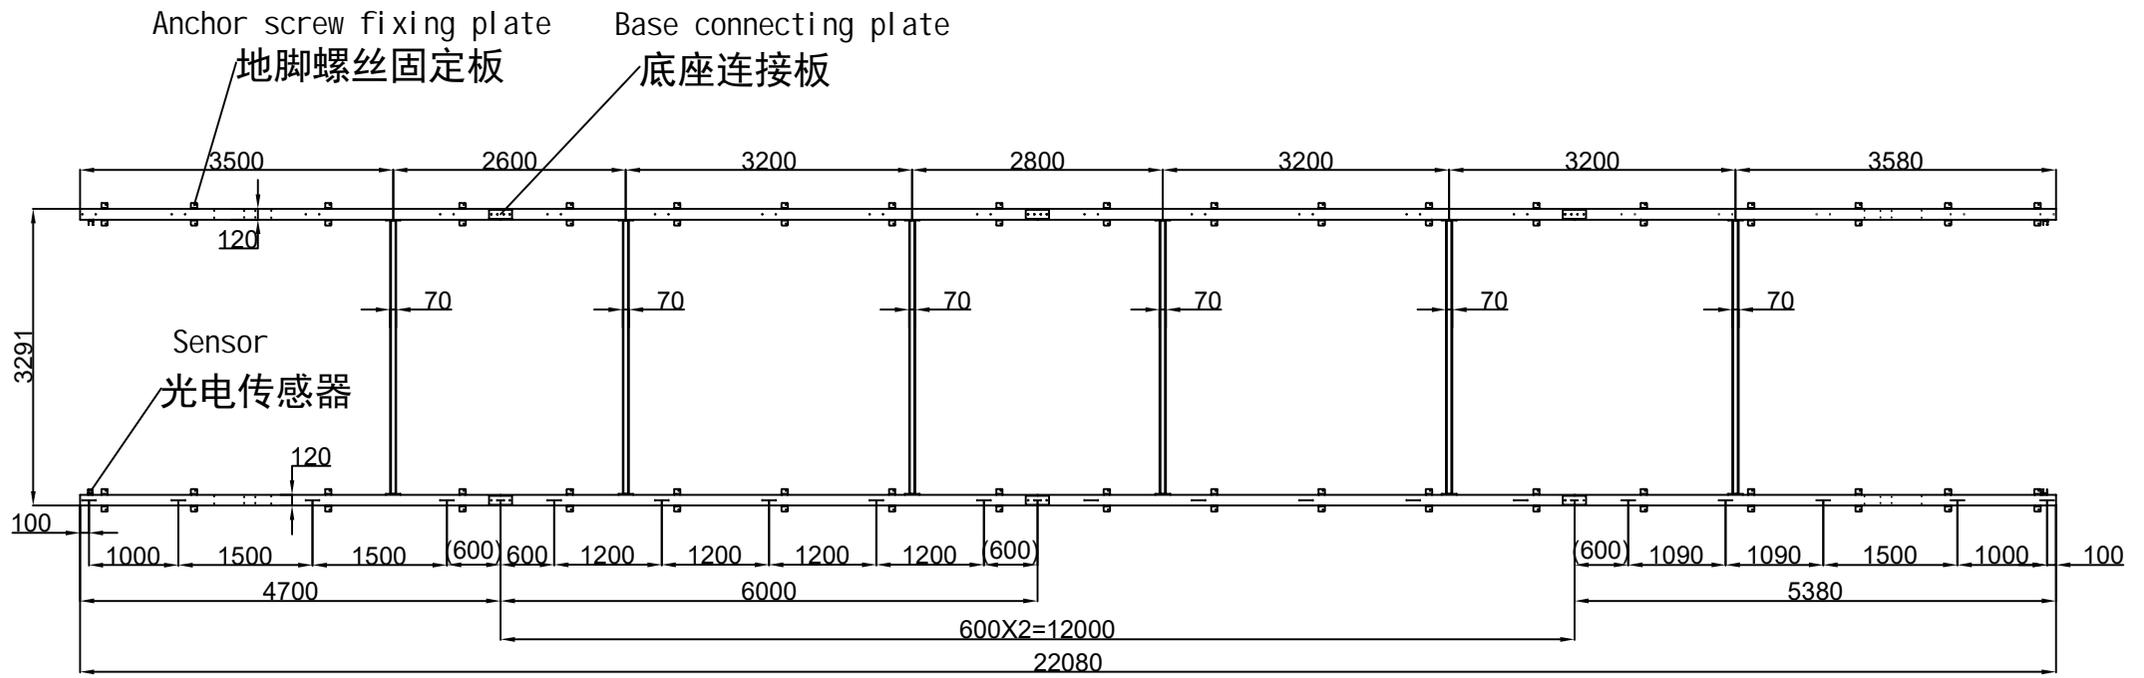


底座 Base

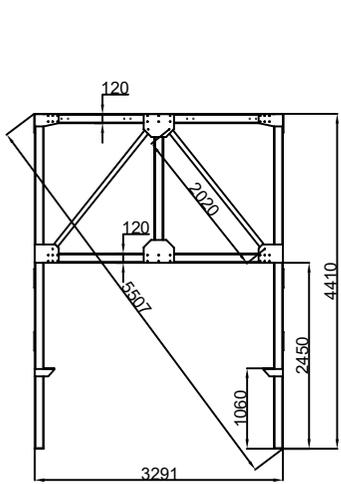


前1

F1

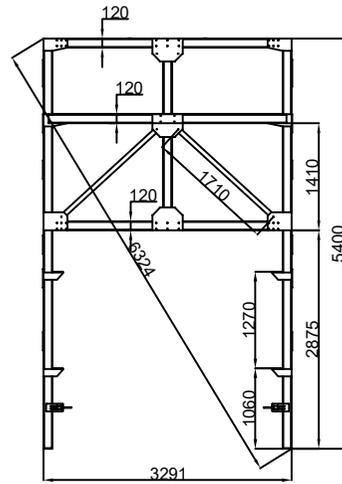


前2

F2

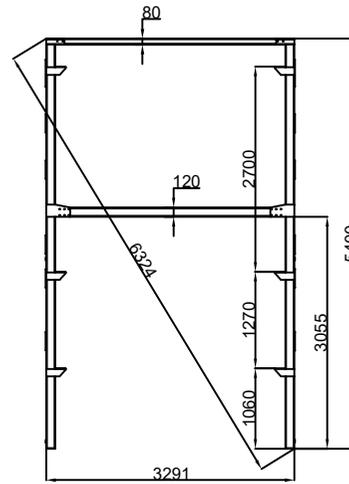


前3

F3

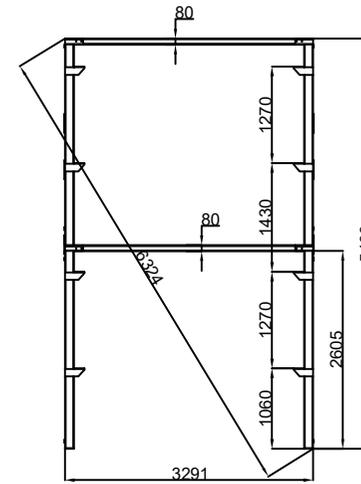


前4

F4

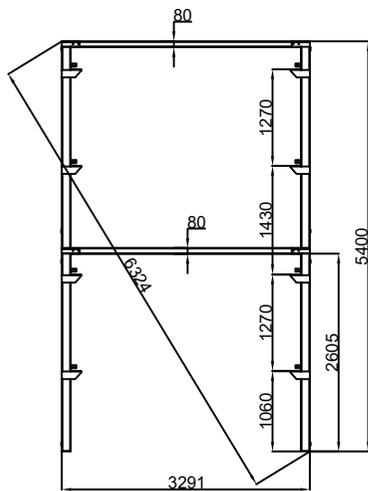


中间

MID

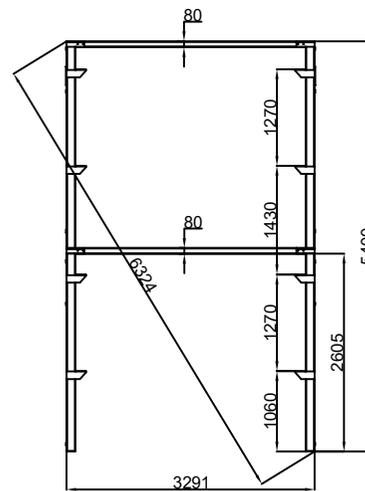


后4

B4

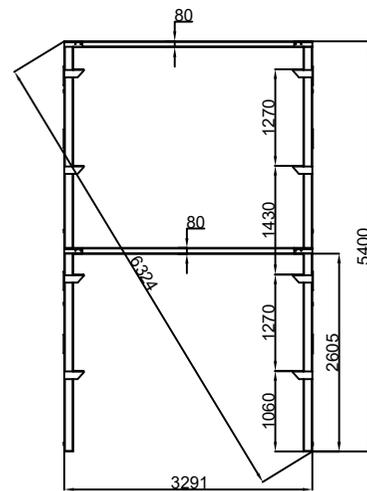


后3

B3

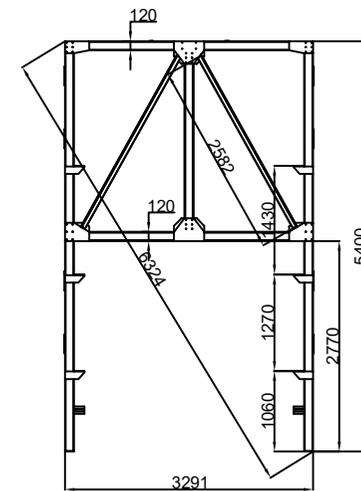

后2

B2







后1





B1

门架(A向)





MAIN FRAME (DIRECTION A)

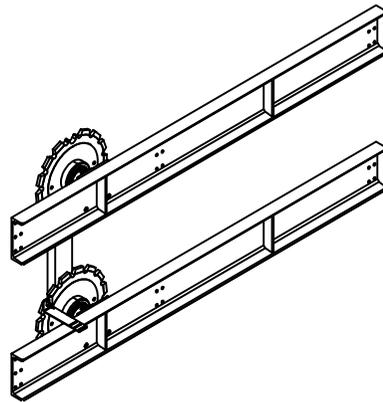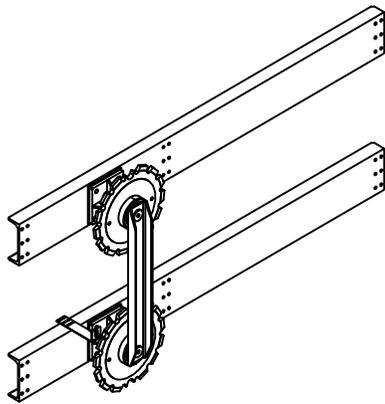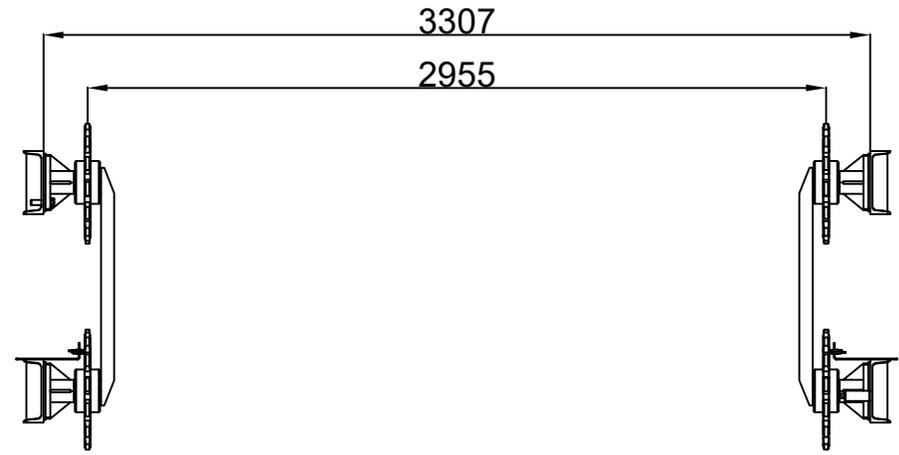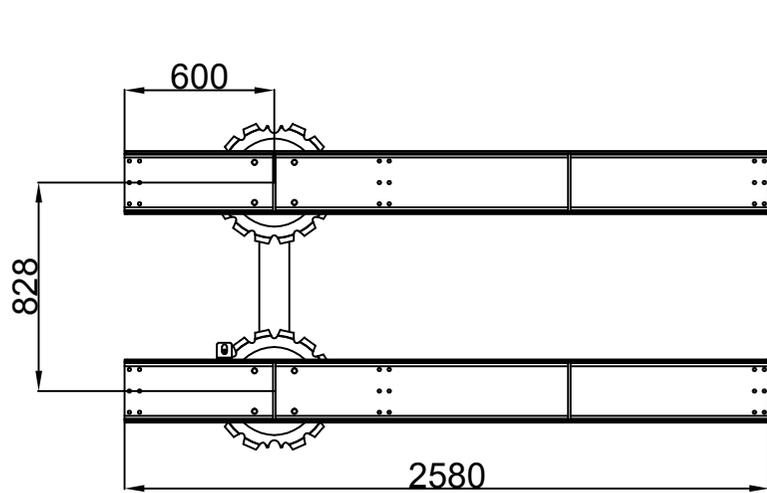

机 型	ST-BS-60 四层单挂双出						SUNTECH	
经 轴	φ1000x2565 1500kg						Transition Shaft	
单 号	ST202500232	日 期	2025.11				Assembly 1	
设 计		标准 化		阶 段 标 记		重 量	比 例	ST-BS-60-BS501
校 对							1:1	
工 艺		批 准		共 1 张 第 1 张				

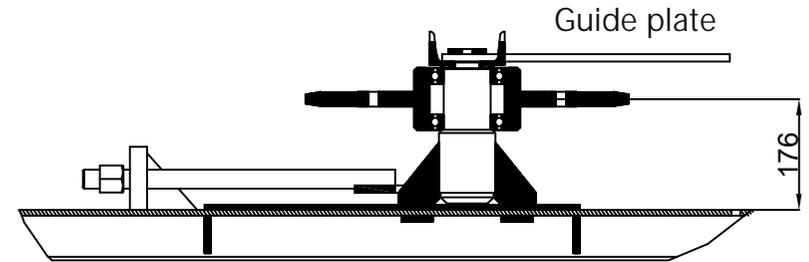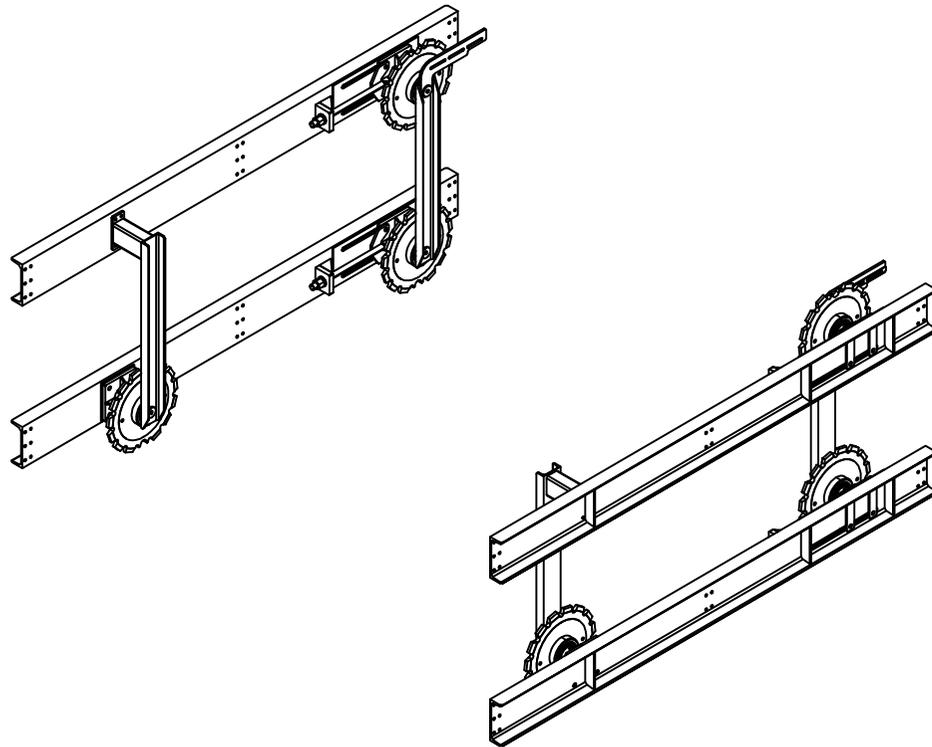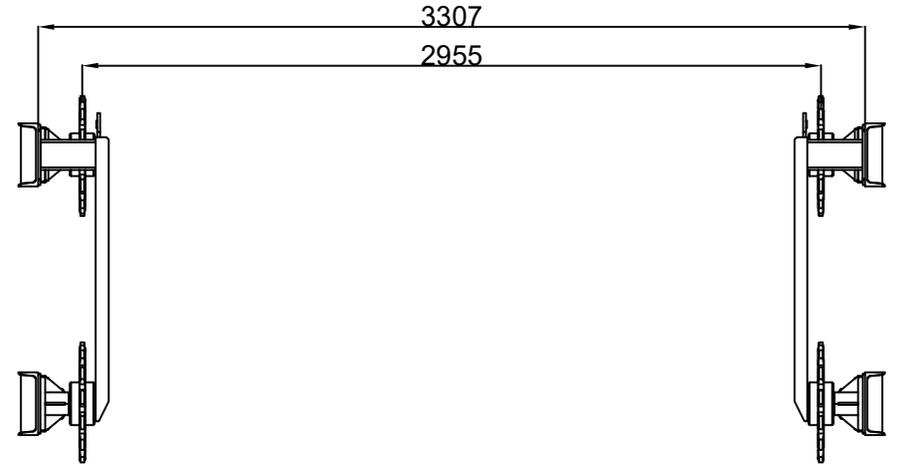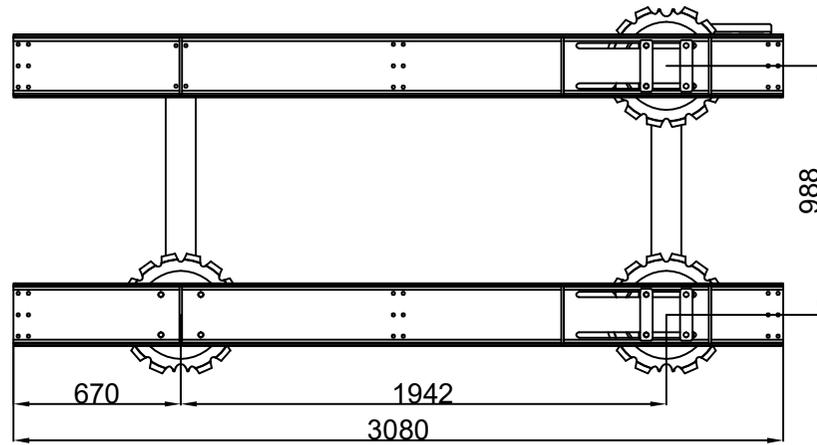


机 型	ST-BS-60 四层单挂双出						SUNTECH
经 轴	φ1000x2565 1500kg						Transition Shaft Assembly 2
单 号	ST202500232	日 期	2025.11				
设 计		标准化		阶段标记	重 量	比 例	ST-BS-60-BS502
校 对						1:1	
工 艺		批 准		共 1 张 第 1 张			

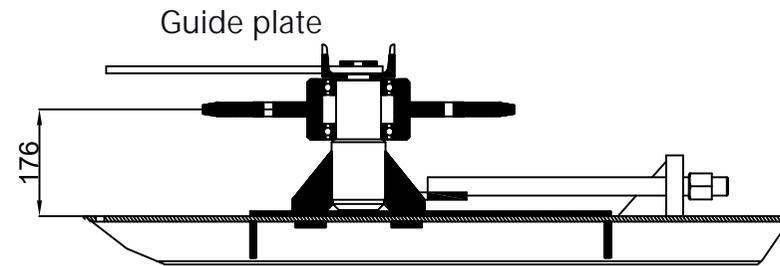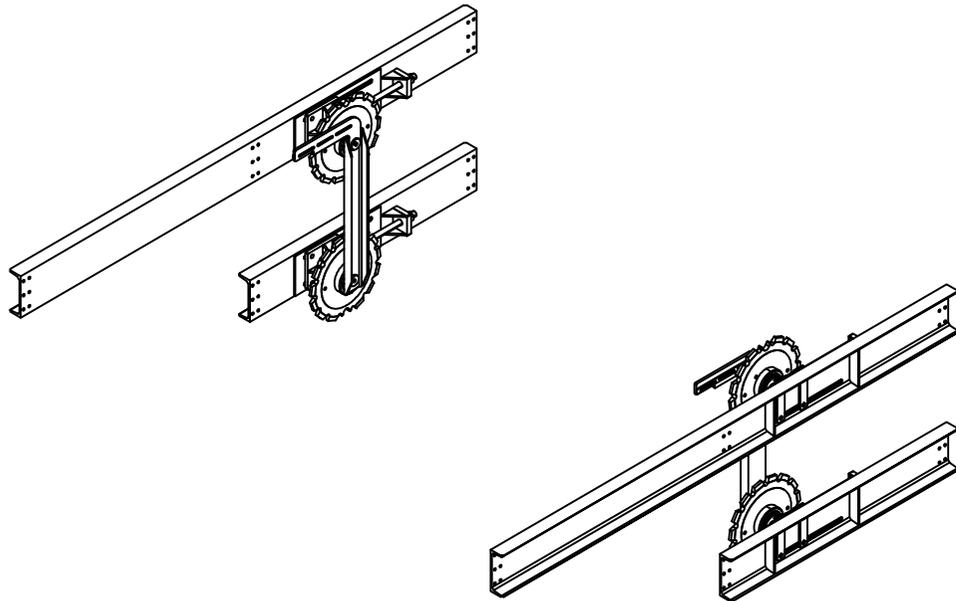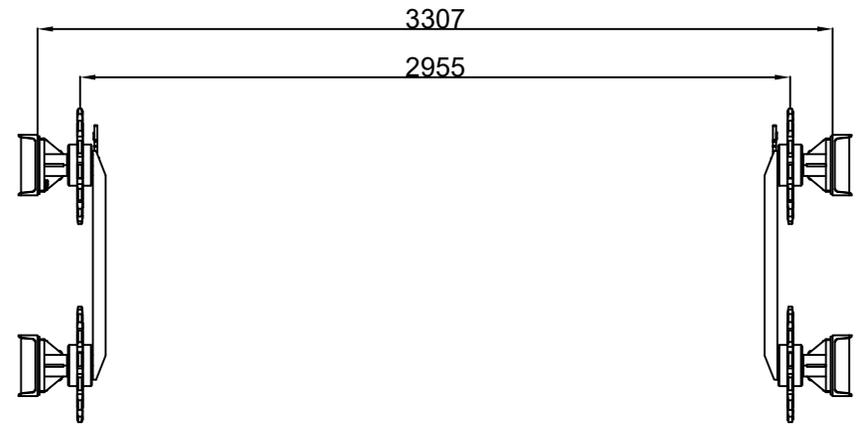
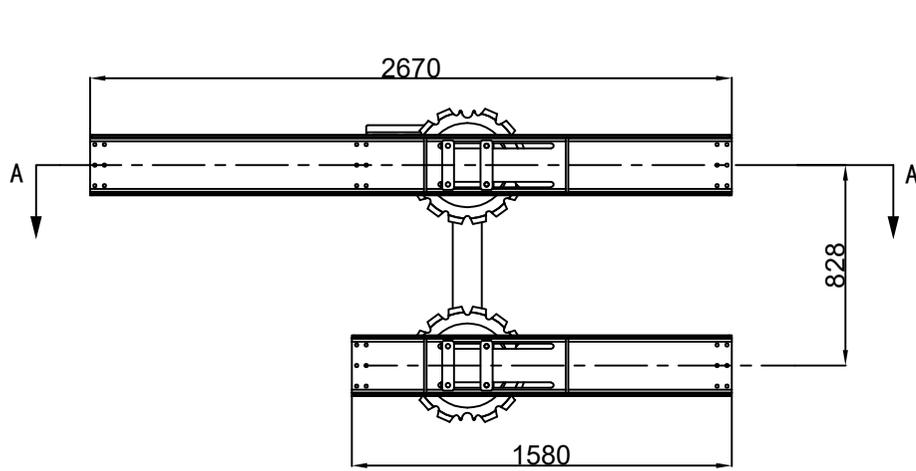


A-A
1:2.5


机 型	ST-BS-60 四层单挂双出						SUNTECH
经 轴	φ1000x2565 1500kg						Adjustment
单 号	ST202500232	日 期	2025.11				Shaft Assembly
设 计		标准化		阶段标记	重 量	比 例	ST-BS-60-BS503
校 对						1:1	
工 艺		批 准		共 1 张 第 1 张			

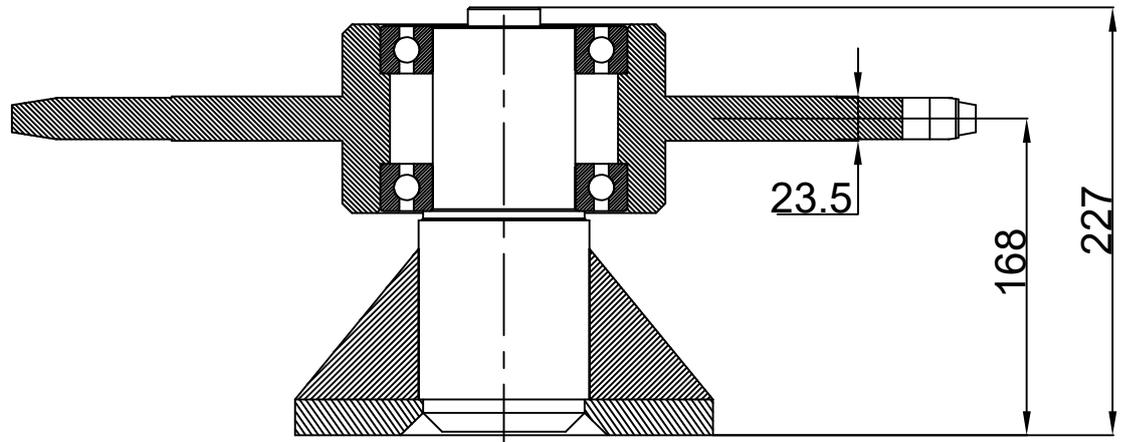

机 型	ST-BS-60 四层单挂双出							SUNTECH	
经 轴	φ1000x2565 1500kg							sprocket Assembly	
单 号	ST202500232	日 期	2025. 11		阶段标记		重 量		
设 计		标准化						1:1	ST-BS-60-BS505
校 对					共 1 张 第 1 张				
工 艺		批 准							

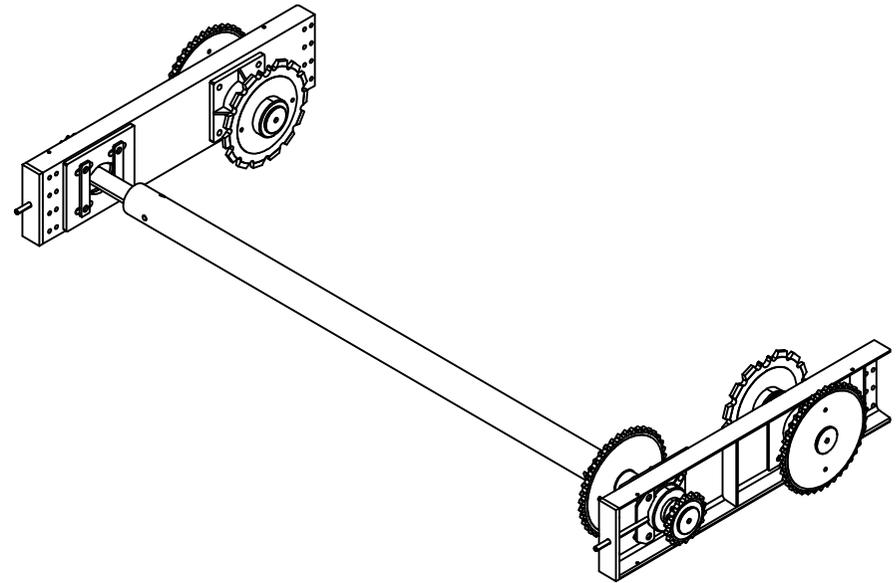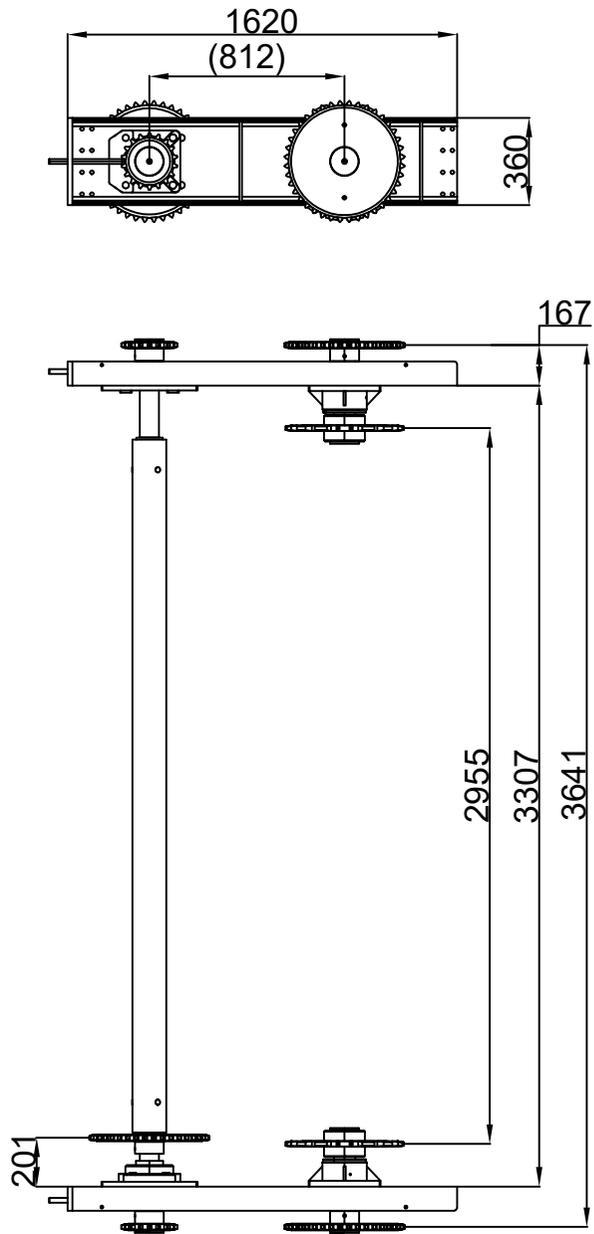

机 型	ST-BS-60 四层单挂双出						SUNTECH
经 轴	φ1000x2565 1500kg						Transmission Shaft
单 号	ST202500232	日 期	2025.11				Assembly
设 计		标准化		阶段标记	重 量	比 例	ST-BS-60-BS507
校 对						1:1	
工 艺		批 准		共 1 张 第 1 张			

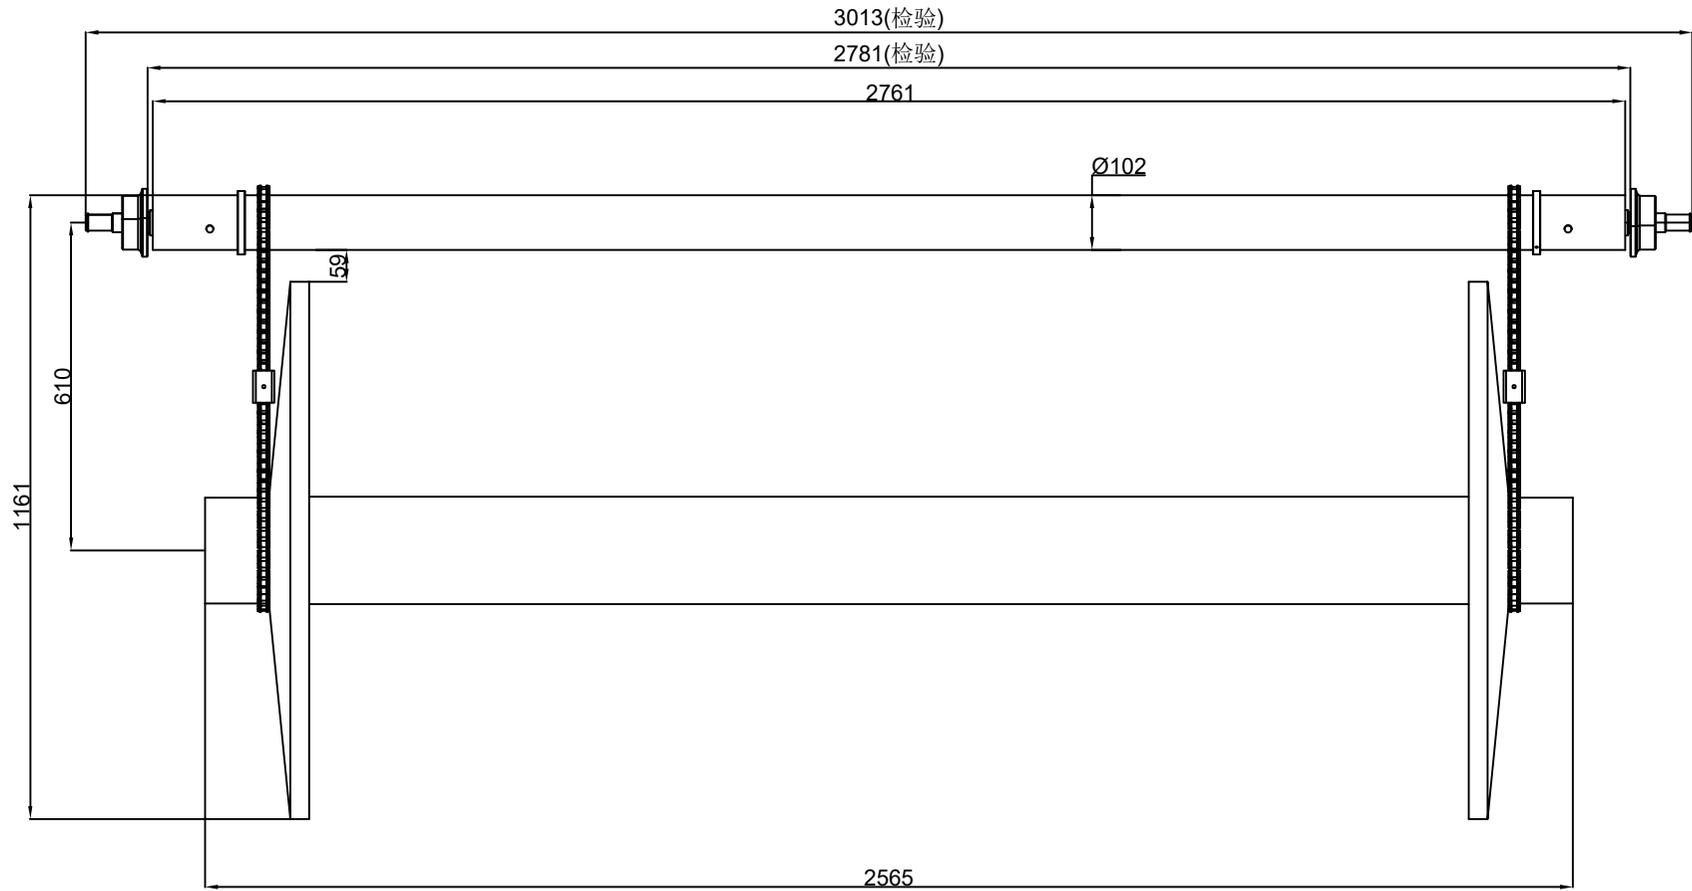

机 型	ST-BS-60 四层单挂双出							SUNTECH
经 轴	φ1000x2565 1500kg							Hanging Shaft Assembly
单 号	ST202500232	日 期	2025.11					
设 计		标 准 化		阶 段 标 记			重 量	比 例
校 对							1:1	ST-BS-60-BS601
工 艺		批 准		共 1 张			第 1 张	